



## TUPLA KUPLA

Ohje lamppujen vaihtoon

Tupla Kupla sisältää kolme E14-kantaista energiansäästölamppua. Suuremmissa Tupla Kuplan kuplista on 11 watin lamppu, muut kaksi ovat 8 watin lamppuja. On suositeltavaa korvata palanut lamppu saman valmistajan samanmallisella lampulla. Näin varmistutaan siitä, että valon väri on sama koko valaisimessa. Suositeltavia lamppuja ovat esimerkiksi Megaman Liliput ja Osram Mini Twist.

Ensimmäiseksi irrota Tupla Kuplan virtajohto pistokkeesta.

Päästäksesi lamppuihin käsiksi kaada Tupla Kupla varovasti kyljelleen naarmuttamattomalle alustalle.

Irrota metallipohja, johon lamppuja pitävät varret on kiinnitetty, avaamalla Tupla Kuplan pohjassa olevat neljä ruuvia. [1]

Tupla Kuplan kuplista suuremmissa lamppua pitävä varsi joustaa. Ota metallirakenne varovasti ulos Tupla Kuplasta kiertäen sitä niin, että tämä varsi joustaa muovirunkoa vasten. [2]

Kun metallirakenne on esillä, voit kiertää palaneet lamput irti lampunkannoistaan ja korvata ne uusilla.




Asentaaksesi metallirakenteen takaisin Tupla Kuplaan taita joustavaa vartta varovaisesti yli keskimmäisen varren ja syötä varret varjostimen suusta sisään pieneessä kuplassa lamppua pitävä varsi edellä. [3]

Kun lamppuja pitävät varret ovat varjostimen sisällä, seuraa ylläolevia ohjeita käänteisessä järjestyksessä. Varo kiristämästä pohjan ruuveja liikaa, jotta kierteet muoviosassa eivät rikkoonu.

Valmistaja:

Melaja Oy  
+358 10 321 0940  
info@melaja.fi

www.doublebubble.fi

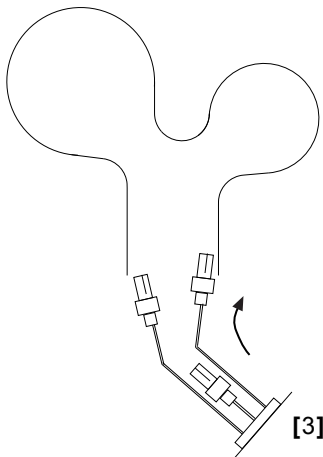

## DOUBLE BUBBLE

Instructions on installing and changing lamps

The Double Bubble is lighted with three E14 type compact fluorescent lamps - two 8 watt lamps and a 11 watt lamp in the larger of the 'bubbles'. When replacing a lamp, it is recommended to use the same brand and type of lamp as the other two are. This ensures uniform color of light. Recommended lamps are for example Megaman Liliput and Osram Mini Twist.

Always disconnect the power cord from the wall socket before opening the Double Bubble.

To access the lamps, turn the Double Bubble over to its side. Remove the four screws at the bottom. [1]

The arm holding a lamp in the larger 'bubble' of the Double Bubble is flexible. Bending this arm against the side of the Double Bubble, carefully remove the metal structure from inside the Double Bubble. [2]

Once the metal structure is out of the Double Bubble, you can replace the lamps.

After changing the lamps, gently bend the flexible arm over the shortest arm. Insert the arms back into the Double Bubble aligned so that the arm holding a lamp in the smaller 'bubble' is going in first. [3]

When the arms are in the Double Bubble, follow the above instructions in reverse order. Be careful not to tighten the screws too much as this might break the threads in the plastic.

Please note that compact fluorescent lamps take a moment to warm up - thus the color of light may not seem perfect immediately after the lamp has been turned on.

The Double Bubble is manufactured in Finland by:

Melaja Ltd  
+358 10 321 0940  
info@melaja.fi

www.doublebubble.fi

